



**TU | TU-L
TN-L**

TRAILERS



MADE FOR YOUR MISSION

ALL-ROUNDER

04

Our TU type trailer is a true “all-rounder” in the construction industry. Extensive accessories and the extremely robust design construction ensure that almost any load can be simply transported. The TU is a reliable partner which is supplied in well-known Goldhofer quality and guarantees you a high resale value when you can actually part with it.



TOUGH TO BEAT THE SOLUTION FOR EXPERTS

The daily tasks in the hard construction industry demand everything from the transport vehicles. Our trailers are the solution when robust and economical vehicles are required. The extensive range of accessories ensures that every load in the payload range up to 47 t becomes a light one.

IT NEVER REACHES ITS LIMIT

06

The TN-L type differs from the TU only by a built-in trailing steering axle and the additional air suspension. This makes it even more flexible in use, as your TN-L is even more maneuverable and even extreme payloads can be handled easily.





YOUR BENEFITS

- ✓ Comprehensive screwed-on accessories, also for load securing
- » Quick and safe movement for loads
- ✓ Longer excavator crawler deck
- » Lowest loading heights to fulfill the most stringent height guidelines
- ✓ Bend-stiffened and more robust vehicle frame
- » Reliability and durability



TECHNICAL FEATURES

- + Axle load
(depending on country-related regulations)
(technical) 10 t at 80 km/h
12 t at 80 km/h
- + Loading height 835-860 mm
- + Tires 245/70 R 17,5
- + Vehicle width 2,550 mm
- + Axle spacing 1,360 mm

TU | TU-L THE ALL-ROUNDER



COMPREHENSIVE ACCESSORIES



INTEGRATED RAMP PROTECTION



MORE ROBUST VEHICLE FRAME



- + Loading area length
5,700 mm/6,200 mm/6,500 mm/6,700 mm/7,000 mm/7,500 mm
- + Number of axles 3-4



LONG-TERM SUCCESS

Experts know what they need to do a really good job. The TU supports you as efficient and future-proof vehicles in daily use in the construction industry.



YOUR BENEFITS

- ✓ Comprehensive screwed-on accessories, also for load securing
- » Quick and safe movement for loads
- ✓ Bend-stiffened and more robust vehicle frame
- » Reliability and durability
- ✓ Trailing steering axle
- » Increased maneuverability in action



TECHNICAL FEATURES

- + Axle load
(depending on country-related regulations)
(technical) 10 t at 80 km/h
12 t at 80 km/h
- + Loading height 875 mm
- + Tires 245/70 R 17,5
205/70 R 17,5
- + Vehicle width 2,550 mm/2,750 mm
- + Axle spacing 1,360 mm

TN-L IT NEVER REACHES ITS LIMIT



HIGH MANEUVERABILITY

HIGHEST PAYLOADS

COMPREHENSIVE ACCESSORIES



- + Loading area length 7,300 mm/7,400 mm/8,500 mm
- + Number of axles 5-6



WHAT MATTERS IN EVERYDAY LIFE

A good job requires a strong vehicle – our trailer type TN-L is your faithful companion in everyday transport – equipped with extensive accessories and various lashing options, payloads of up to 47 t are a breeze.

TU | TU-L | TN-L ACCESSORIES




GENERAL ACCESSORIES	<ul style="list-style-type: none"> + Plastic tool box (<i>screwable</i>) + Spare wheel holder (<i>screwable</i>) + Rubber lining + Warning plate
DRAWBAR	<ul style="list-style-type: none"> + Offset drawbar with swiveling drawbar eye
LOADING AREA	<ul style="list-style-type: none"> + Front stanchion pockets (<i>screwable</i>) + Load securing rails + Roll stem + Collapsible width extension (<i>screwable</i>) + Load trestle (<i>screwable</i>)
RAMP	<ul style="list-style-type: none"> + Hydraulic ramp lifting equipment with integrated ramp securing + Hydraulic ramp displacement + Hydraulic support + Climbing bars on the ramp + 1- or 2-part ramp

TU | TU-L | TN-L TECHNICAL DATA



	TU TU-L	TN-L	
TECHNICAL DATA	Axle load (depending on country-related regulations) (technical)	10 t at 80 km/h 12 t at 80 km/h	10 t at 80 km/h 12 t at 80 km/h
	Loading height	835-860 mm	875 mm
	Tires	245/70 R 17.5	245/70 R 17.5 205/70 R 17.5
	Vehicle width	2,550 mm	2,550 mm/2,750 mm
	Loading area length	5,700 mm/6,200 mm/6,500 mm 6,700 mm/7,000 mm/7,500 mm	7,300 mm/7,400 mm/8,500 mm
	Axle spacing	1,360 mm	1,360 mm
	Number of axles	3-4	5-6
	Surface area refinement	Durability ensured with high-quality paintwork with zinc-dust base coat	

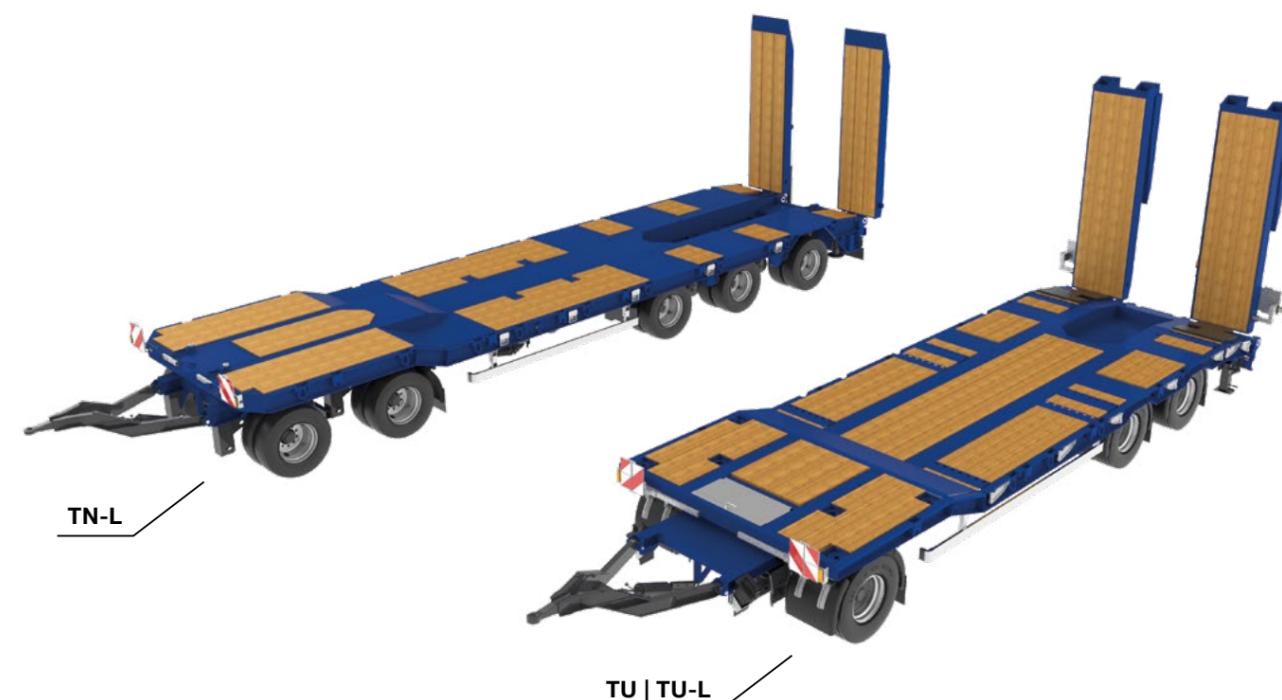

GOLDHOFER AKTIENGESELLSCHAFT
 Donaustrasse 95, 87700 Memmingen/Germany
 Telephone: +49 8331 15-0, Fax: +49 8331 15-239
 Web: www.goldhofer.com, E-Mail: info@goldhofer.com

GOLDHOFER INC. | FLITELINE, LLC
 7401 Riviera Boulevard, Miramar, FL 33023, USA
 Telephone: +1 954 433 5617, Fax: +1 954 433 5445
 Web: www.goldhofer.com, E-Mail: info@goldhofer.com
 Web: www.flitelineusa.com, E-Mail: info@flitelineusa.com

SALES
 Telephone Sales Europe: +49 8331 15-341
 Telephone Sales International: +49 8331 15-342
 E-Mail: sales-transporttechnology@goldhofer.com

SERVICES AND SPARE PARTS
 Telephone: +49 8331 15-400, Fax: +49 8331 15-247
 Emergency Hotline: +49 172 837 61 65
 E-Mail: service-transporttechnology@goldhofer.com